


KOS3000C_400V

belt sanding machine with oscillation

- heavy and precise industrial setup
- veneer sanding attachment with fine adjustment function, veneer shoe, fence, release rollers
- special fence with nuts for veneer-overhang
- separate oscillation gear drive
- bar guided cast iron table height adjustment via hand wheel
- extractable table extension with multi-roller system
- double dust collecting system of round table and main sanding unit
- main sanding unit steplessly adjustable from vertical to 45° via hand wheel
- precision guided sanding rollers allow smooth belt-run
- precise mitre gauge with angle scale
- spring mounted band tension system
- graphite coated contact surface minimizes friction
- dust collecting diameter: 120mm
- horizontal easy gliding parallel guiding system at the working table

included in delivery: sanding belt grain, mitre gauge, veneer sanding device, round-sanding table, table extension

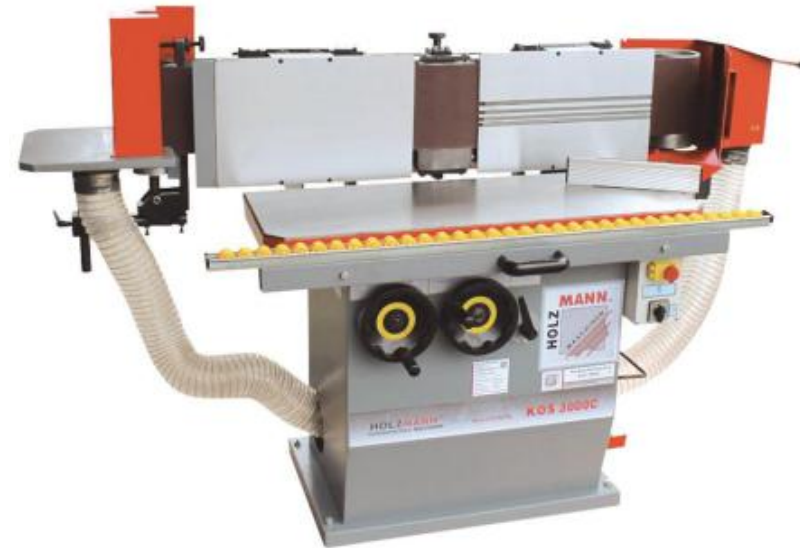

**YOUR
JOB.
OUR
TOOLS.**

KOS3000C_400V

belt sanding machine with oscillation



technical details

motor power s6 in W	4200
voltage	400V
belt dimensions in mm	3000x200
net weight in kg	284
packaging height in mm	1.200
packaging length in mm	1.680

motor power s1 in W	3000
table size in mm	960x350
belt speed	20
gross weight in kg	350
packaging width in mm	930
EAN code	9120039904146

**YOUR
JOB.
OUR
TOOLS.**